




**ROOF SYSTEM ASSESSMENT REPORT  
DYNAMIC UPLIFT RESISTANCE PER CSA A123.21**

CLIENT:	The Garland Company	TEST DATE:	2020-10-12 & 2020-11-04
DOCUMENT NO.	GRL-PARS-1.9	PUBLICATION DATE:	2024-03-18
TEST PANEL NO.	GRL-D7 + GRL-D8	REVISION NO.	2
SYSTEM TYPE:	B	REEVALUATION DATE:	2027-03-18

**PARTIALLY ADHERED ROOFING SYSTEM (PARS) SUMMARY**

PERFORMANCE ⇒	PASSING PRESSURE	WIND UPLIFT RESISTANCE (RESISTANCE FACTOR 0.65)
	100 psf (4.8 kPa)	67 psf (3.2 kPa)

COMPONENT	ALLOWABLE PRODUCTS	
	PRODUCT	ATTACHMENT
SURFACING ⇒	(Optional) One of the following: 1. Minimum 400-lbs/100-ft. <sup>2</sup> roofing gravel* in a flood coat of hot roofing asphalt at 60 lbs/square, or 2. Adhered surfacing options specified in UL Certifications under UL File <a href="#">TGFU.R8384</a> . *Refer to local Building Code for limitations concerning use of gravel surfacing.	
CAP PLY ⇒	StressPly IV, StressPly IV Mineral, StressPly IV UV Mineral, StressPly IV Plus, StressPly IV Plus UV Mineral or StressPly IV Plus Mineral	Torch-applied
PLY ⇒	(Optional) HPR Torch Base Sheet	Torch-applied
BASE PLY ⇒	HPR Torch Base Sheet	Torch-applied
COVERBOARD ⇒	Min. 0.5-inch USG "SECUROCK Gypsum-Fiber Roof Board"	Insul-Lock HR, continuous ribbons, 12-inch o.c.
INSULATION ⇒	One or more layer(s), top layer min. 2-inch thick, Atlas "ACFoam II", Hunter "H-Shield" or Johns Manville "ENRGY 3"	Topmost layer mechanically attached: ✓ Altenloh "Trufast #14 HD" with "Trufast 3" Metal Insulation Plate" ✓ OMG "#14 Roofgrip" with "OMG 3 in. Galvalume Steel Plate" or "AccuTrac Plate" ✓ SFS Group "Dekfast DF-#14-PH3" with "Dekfast PLT-H-2-7/8" or "Dekfast PLT-R-3"
VAPOUR BARRIER ⇒	Grip-Rite Titan™ LD or other kraft paper or 6-mil polyethylene	Loose laid

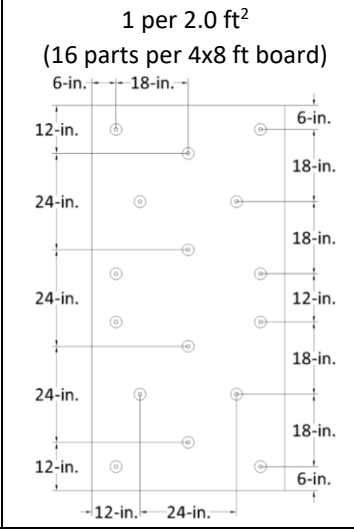

**ROOF SYSTEM ASSESSMENT REPORT, DYNAMIC UPLIFT RESISTANCE PER CSA A123.21**

CLIENT:	The Garland Company	PUBLICATION DATE:	2024-03-18
DOCUMENT NO.	GRL-PARS-1.9	REVISION NO.	2
TEST PANEL NO.	GRL-D7 + GRL-D8	REEVALUATION DATE:	2027-03-18



Page 2 of 2

COMPONENT	ALLOWABLE PRODUCTS	
	PRODUCT	ATTACHMENT
<b>THERMAL BARRIER (OPTIONAL) ⇒</b>	Any type or thickness acceptable to the Authority Having Jurisdiction	Loose-laid, adhered or mechanically-attached
<b>DECK ⇒</b>	Minimum 22 ga. type B steel meeting ASTM A653, A792, A1008 or CSSBI 10M standards and having a yield strength of 275 MPa (40 ksi), or alternate steel deck providing the fastener withdrawal resistance noted below.	
<b>INSULATION FASTENER POINT-LOAD ⇒</b>	200 lbf (890 N)	

NEMO ETC CREDENTIALS		
TYPE	ENTITY	REFERENCE
ISO/IEC 17025 Accreditation	International Accreditation Service (IAS)	<a href="#">TL-689</a>
TAS 301 Certification	Miami-Dade	<a href="#">21-0409.01</a>
Third Party Test Data Program	UL, LLC	<a href="#">DA2862</a>
Test Lab Listing	Roofing Contractors Association of British Columbia	<a href="#">RCABC Labs</a>

REPORT HISTORY			
DATE	EVENT	NOTES	AUTHORIZED BY:
2020-12-28	FINAL	After customer review	RN
2021-02-25	REV1	Add surfacing options	RN
2024-03-18	REV2	3-year renewal	RN

This report and the data contained therein is the sole property of NEMO|etc. and the named client. This report shall not be reproduced outside NEMO|etc. except by the named client without written permission by the named client, in which case the report shall be reproduced in its entirety.

**END OF REPORT**